

SPIDER

Phase Resolved Ultrafast Pulse Measurement

The **SPIDER** is a new measurement system for phase resolved measurement of ultrashort laser pulses. Providing data about phase and intensity it offers all necessary information about the pulse for complete reconstruction of the electric field. One of its great advantages is the very fast non-iterative analysis algorithm that allows for quasi real-time measurement of phase and intensity. Therefore the **SPIDER** is both a highly sensitive measuring instrument and an adjustment tool for complex laser systems such as regenerative amplifiers.



- Spectral phase
- Spectral intensity
- Temporal intensity
- Autocorrelation function

- Real-time!

- Factory calibrated

- PC controlled

- Suitable for laser oscillators and amplifier systems

- Single shot capability

Laser Diagnostics

Spectral Analysis

Acousto-optics

Non-Linear Optics

Accessories

Your Partner in Ultrafast

SPIDER

The **SPIDER** is based on a patented technology - the Spectral Phase Interferometry for Direct Electric Field Reconstruction. The input pulse is split into two replicas which have a temporal delay in relation to each other. A third part of the pulse goes through a grating stretcher and overlaps with the other two parts in a frequency-converting nonlinear crystal. Since the two replicas are mixed with different spectral components of the stretched pulse they experience a spectral shear. The spectrally sheared pulses are allowed to interfere with each other in a spectrometer. From the resulting spectrogram it is possible to directly calculate the spectral phase profile of the input pulse.

The **SPIDER** comes as a complete, calibrated system consisting of optics unit, computer and analysis software. The user is able to get all relevant information for characterizing the laser pulse without the need for in-depth knowledge of the theoretical background.

SPECIFICATIONS


Wavelength range	750 ... 900 nm ¹⁾
Spectrometer measuring range	700 ... 940 nm
Pulse width	40 ... 150 fs, 20 ... 80 fs or 10 ... 40 fs ²⁾
Minimum required input power	100 mW average @ 80 MHz
Beam diameter	up to 4 mm
Input polarisation	horizontal
Input beam height	115 ... 135 mm

DIMENSIONS

750 mm x 300 mm x 165 ... 185 mm

1) Central wavelength of transform-limited pulses; the actual range depends on pulse width and actual spectrum.

2) These ranges can be covered with exchangeable optics sets.

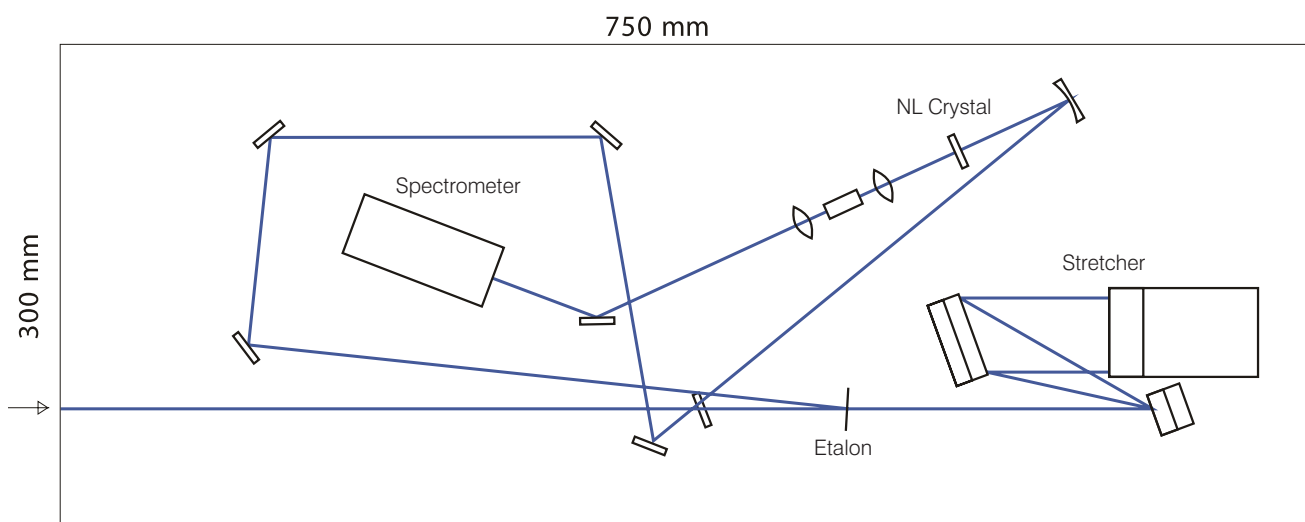

Distributor (Worldwide)
see APE website

APE GmbH Plauener Straße 163-165 / Haus N 13053 Berlin / Germany

Phone +49 (0)30 98601130 Fax +49 (0)30 98697885 / Web www.ape-berlin.com Email ape@ape-berlin.de

APE follows a policy of continued product improvement. Therefore, specifications are subject to change without notice.

日本総代理店

フォトテクニカ株式会社

〒336-0017 埼玉県さいたま市南区南浦和1-2-17

TEL:048-871-0067(代) FAX:048-871-0068

e-mail: voc@phototechnica.co.jp

<http://www.phototechnica.co.jp>