

# PRONTO-500-IPL


Portable Laser Probe for IPL Sources, 2 - 350 J per pulse



## KEY FEATURES

- HIGH ENERGY PER PULSE**  
Accurate readings up to 350 J/pulse!
- EASY-TO-USE**  
The touch screen color LCD allows for a friendly user interface. You can make a measurement with just the touch of a button!
- DATA LOGGING**  
Save your data to the internal memory and then transfer it to your PC over the USB connection.
- LARGE APERTURE**  
55 mm Ø aperture to accommodate large beams
- RUGGED**
  - All-metal body
  - High Damage Thresholds
- PROTECTIVE WINDOW**
  - For measurements with gel-coupled IPL heads.
  - Protects the absorber, easy to clean

## USER INTERFACE (SSE MODE)

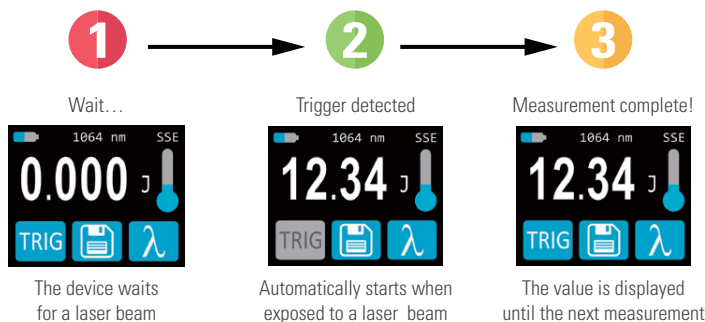

## ACCESSORIES



Stand with Steel Post  
(Model Number: 200234)




Pelican Carrying Case

## SEE ALSO

HOW IT WORKS	12
CALIBRATION	6
TECHNICAL DRAWINGS	62
ABSORPTION CURVES	100
LIST OF ALL ACCESSORIES	194


### Adjust the Wavelength and Calibration

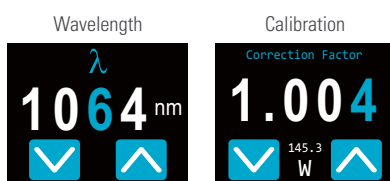

### Warns you when the device is too hot\*



### Set the Brightness and Orientation



\* Device may get hot, it is not recommended for handheld use when making a measurement

MONITORS

ENERGY DETECTORS

POWER DETECTORS

HIGH POWER SOLUTIONS

PHOTO DETECTORS

THZ DETECTORS

OEM DETECTORS

SPECIAL PRODUCTS

BEAM DIAGNOSTICS

# PRONTO-500-IPL

## SPECIFICATIONS

NEW

### PRONTO-500-IPL

<b>MAX PULSE ENERGY (SINGLE SHOT)</b>	350 J
<b>EFFECTIVE APERTURE</b>	55 mm Ø
<b>APERTURE TYPE</b>	Full Aperture with Protective Window

#### MEASUREMENT CAPABILITY

Spectral Range	0.19 - 2.5 µm
Calibrated Spectral Range	1064 nm
Energy Range	2 - 350 J
Noise Equivalent Energy	500 mJ
Sensitivity	0.013 mV/J
Response Time	2 sec
Minimum Repetition Period	15 sec (= time between measurements)
Maximum Pulse Width	433 ms
Accuracy	±5 %

#### DAMAGE THRESHOLDS

Maximum Average Power Density	45 kW/cm <sup>2</sup> (1064 nm, 10 W, CW)
Pulsed Laser Damage Threshold	175 J/cm <sup>2</sup> (10 ms pulses)
Maximum Allowable Absorber Temperature	65 °C

#### GENERAL SPECIFICATIONS

Display Type	Touch Screen Color LCD
Display Size	28.0 x 35.0 mm (128 x 160 pixels)
Backlight	Adjustable
Internet Upgrades Via	USB port
Data Storage	50,000 pts
Battery Type	Rechargeable Li-ion
Battery Life	17 hours or 4 200 measurements (with brightness set at 25%)
Battery Recharge Via	USB port
Operating Temperature Range	15 - 28 °C (max 80% RH)

#### PHYSICAL CHARACTERISTICS

Effective Aperture	55 mm Ø
Dimensions (Sensor Head)	88W x 88L x 32D mm (194L with handle)
Dimensions (Monitor)	41W x 136L x 15D mm
Weight	930 g

#### ORDERING INFORMATION

Common Product Name	PRONTO-500-IPL
Product Number (without stand)	203467

Specifications are subject to change without notice // Compatible stand: P/N 200234

 フォトテクニカ株式会社	〒336-0017 埼玉県さいたま市南区南浦和 1-2-17	<a href="http://www.phototechnica.co.jp">http://www.phototechnica.co.jp</a>
	TEL: 048-871-0067 FAX: 048-871-0068	e-mail: <a href="mailto:voc@phototechnica.co.jp">voc@phototechnica.co.jp</a>