



INTRODUCING THE D-VISION SPECTROMETER:
SINGLE-SENSOR BROADBAND COVERAGE FROM 500 TO 1700 nm

d·vision



sphere
ULTRAFAST PHOTONICS

Sphere Ultrafast Photonics
Rua do Campo Alegre, 1021 - Edifício FC6
4169-007 Porto - Portugal
sales@sphere-photonics.com

www.sphere-photonics.com


INTRODUCING THE D-VISION SPECTROMETER: SINGLE-SENSOR BROADBAND COVERAGE FROM 500 TO 1700 nm

Experience the full spectrum with the d-vision spectrometer, your single-sensor solution for expansive VIS-SWIR analysis. Eliminate the hassle of stitching spectra with d-vision's ability to capture a broad bandwidth from 500 to 1700 nm in a single acquisition.


Our cutting-edge technology and precision engineering allow us to offer you a compact and cost-effective broadband VIS-SWIR spectrometer. The d-vision delivers unparalleled performance, covering a broad range, with resolutions from 1 nm to 3 nm depending on your grating selection.

With the d-vision software, simplicity meets sophistication. Its user-friendly interface, combined with a robust set of features, ensures that your measurement experience is both effortless and enjoyable.

Discover the d-vision difference, where your most ambitious spectral measurements become a seamless reality.

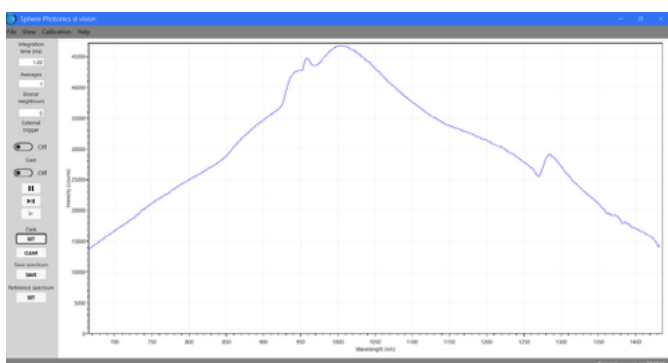

Spectral response of d-vision model 700 nm – 1400 nm

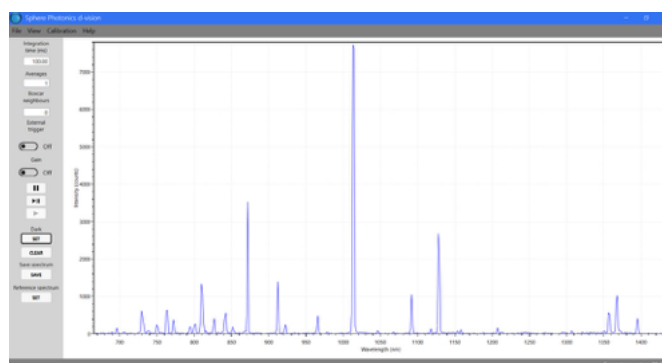

Spectrum of Hg lamp

TECHNICAL SPECIFICATIONS

	d-vision
Wavelength range	500 - 1700 nm ^(a) (grating dependent)
Detector	512 px
Slit	25 µm ^(a)
Integration Time	10 µsec - 1 sec
AD converter	16-bit
Interface	USB Type-C, 2.0 protocol
Dimensions (WxLxH)	85 mm x 67 mm x 30 mm

(a) Other options on request

Typical Range Selection		
Wavelength range	Spectral Bandwidth	Resolution
500 - 1670 nm	1170 nm	3.1 nm
800 - 1700 nm	900 nm	2.4 nm
500 - 1250 nm	750 nm	2.0 nm
650 - 1400 nm	750 nm	2.0 nm
950 - 1680 nm	730 nm	2.0 nm
980 - 1080 nm	100 nm	0.7 nm



Talk to us for different wavelength ranges.