


CUSTOM / OEM PRODUCTS


Product characteristics

Gentec-EO offers OEM customers the highest flexibility so that you make no compromise. Whether you want a different housing, a specific sensitivity or another output connector, we have a solution for you. We will customize existing models or design a whole new detector to meet your needs.

COMPACTNESS

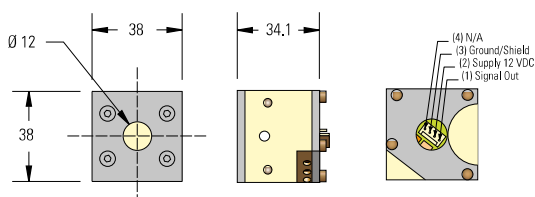

As an OEM, we know space is often a constraint. This is why we offer very compact detectors to ease the integration inside machines. Users can mix and match existing detectors and cooling modules from a large set of combinations.



PERFORMANCE

Anticipation

0-95% of the signal in as quickly as 0.3 s with the small UD12-70-H5 and in 0.6 s with the UD19-150-H5 using our external PCB.

Amplification


Adjust your disk sensitivity to get the perfect voltage for your acquisition system. Disks can be adjusted from 0.01 V/W up to 10 V/W depending on the model.

Filtering

Eliminate the high frequency noise coming from the environment with the integrated low-pass filter of our PCB.

CONNECTIVITY

Gentec-EO offers you several types of output connectors, from the more standard DB15, BNC and Molex to any exotic type you may need.

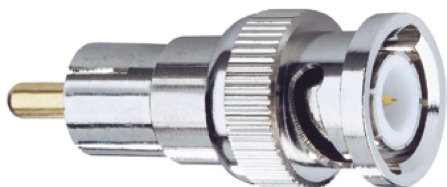

DB15

This connector contains an EEPROM with custom calibration data for both power and energy detectors.

BNC

The BNC output gives you fast, easy installation and direct connection to an oscilloscope

Molex or bare wires

The internal PCB gives an amplified signal output that can be accessed via a Molex connector and cable or bare wires. It is convenient for integrated systems.

CUSTOM / OEM PRODUCTS

Overview of the different models

Almost anything you see in our product line can be turned into an OEM unit! We also offer standard OEM products, at different levels of integration: from the simple thermopile disk to a complete head with internal PCB for signal anticipation and amplification.

UD SERIES



- Thermal sensor disks
- Designed for integration
- Many sizes and absorber choices:
 - 10, 12, 19, 25, and 55 mm Ø apertures
 - Broadband or high damage threshold coatings

■ THERMAL SENSOR DISKS

Available with

integra


blu

UP SERIES



- Complete thermal heads with cooling modules
- Several sizes, coolings and absorber choices:
 - Apertures from 10 to 55 mm Ø
 - Broadband or high damage threshold coatings
 - Convection, fan or water-cooled
- DB15, USB, RS-232 or wireless

■ THERMAL SENSOR HEADS

UP SERIES WITH PCB



- Complete thermal heads with cooling modules
- Internal PCB for amplification, anticipation and filtering
- Several sizes, coolings and absorber choices:
 - 10, 12, 19, 25, 50 and 55 mm Ø apertures
 - Broadband or high damage threshold coatings
 - Convection, fan or water-cooled
- DB15, BNC or Molex connector, or bare wires

■ THERMAL SENSOR HEADS WITH PCB