

## Optical Parametric Amplifiers

Continuous tunability from  
UV to MIR, 190 – 16 000 nm


Single-shot – 2 MHz repetition rate

Up to 80 W pump power


Up to 0.4 mJ pump pulse energy




ORPHEUS typical tuning curves  
Pump: 80 W, 400  $\mu$ J, 200 kHz

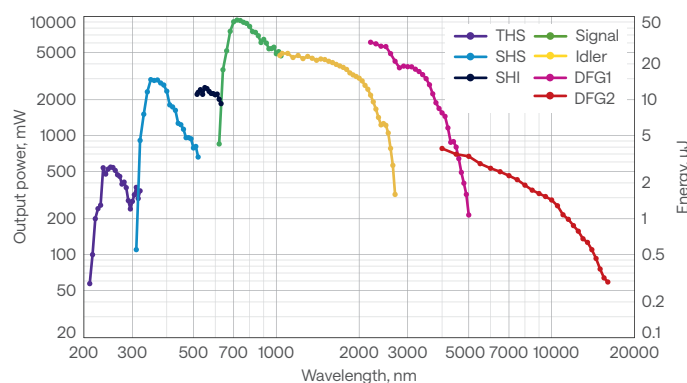

ORPHEUS-F typical tuning curves  
Pump: 40 W, 40  $\mu$ J, 1000 kHz

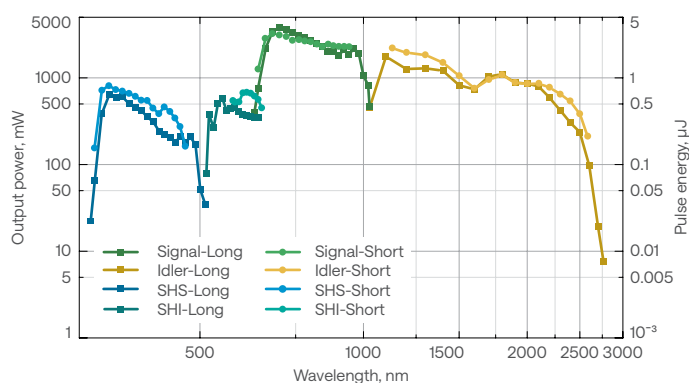

ORPHEUS-ONE typical tuning curves  
Pump: 40 W, 40  $\mu$ J, 1000 kHz

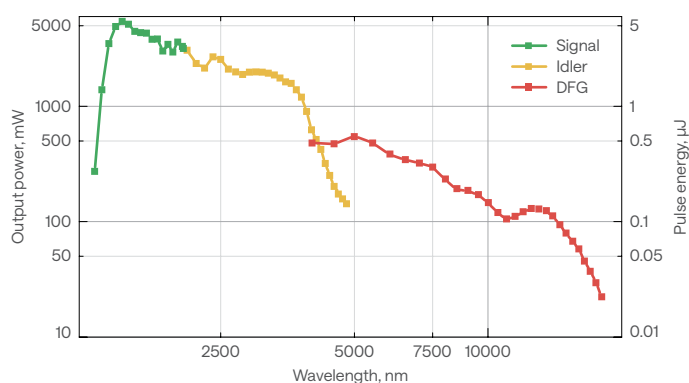

Optics Toolbox



## Specifications

| Model                                                | ORPHEUS                                          |                                             | ORPHEUS-F                                                                                                                        | ORPHEUS-ONE                                                        |
|------------------------------------------------------|--------------------------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Tuning range <sup>1)</sup>                           | 630 – 1030 nm (signal)<br>1030 – 2600 nm (idler) |                                             | 650 – 900 nm (signal)<br>1200 – 2500 nm (idler) <sup>2)</sup>                                                                    | 1400 – 2000 nm (signal)<br>2100 – 4200 nm (idler)                  |
| Pump power                                           | Up to 80 W                                       |                                             |                                                                                                                                  |                                                                    |
| Repetition rate                                      | Up to 2 MHz                                      |                                             |                                                                                                                                  |                                                                    |
| Pump pulse energy <sup>3)</sup>                      | 8 – 20 µJ                                        | 20 – 400 µJ                                 | 10 – 400 µJ                                                                                                                      | 12 – 400 µJ                                                        |
| Conversion efficiency                                | > 4.5% @ peak (signal)<br>> 2% @ peak (idler)    | > 9% @ peak (signal)<br>> 4% @ peak (idler) | > 7% @ 700 nm <sup>4)</sup>                                                                                                      | > 9%, 30 – 40 µJ pump @ 1550 nm<br>> 6%, 12 – 30 µJ pump @ 1550 nm |
| Pulse duration                                       | 120 – 400 fs                                     |                                             | < 55 fs<br>@ 800 – 900 nm <sup>5)</sup><br>< 70 fs<br>@ 650 – 800 nm <sup>5)</sup><br>< 100 fs<br>@ 1200 – 2000 nm <sup>5)</sup> | 100 – 300 fs                                                       |
| Spectral bandwidth                                   | 60 – 220 cm <sup>-1</sup>                        |                                             | 200 – 750 cm <sup>-1</sup><br>@ 650 – 900 nm                                                                                     | 50 – 150 cm <sup>-1</sup> @ 1450 – 2000 nm                         |
| Long-term power stability, 8 h <sup>6)</sup>         | < 2% @ 800 nm                                    |                                             |                                                                                                                                  | < 2% @ 1550 nm                                                     |
| Pulse-to-pulse energy stability, 1 min <sup>6)</sup> | < 2% @ 800 nm                                    |                                             |                                                                                                                                  | < 2% @ 1550 nm                                                     |
| Compressor transmission                              | n/a                                              |                                             | 65% @ 650 – 900 nm<br>80% @ 1200 – 2000 nm                                                                                       | n/a                                                                |

## WAVELENGTH EXTENSIONS

|          |                                                                                |                                                                              |                                                              |                                                                                                   |
|----------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| DUV      | n/a                                                                            | 190 – 215 nm:<br>> 0.3% @ 200 nm <sup>7)</sup>                               | n/a                                                          | n/a                                                                                               |
| THS      | 210 – 315 nm:<br>> 0.4% @ 250 nm <sup>8)</sup>                                 | 210 – 315 nm:<br>> 0.8% @ 250 nm <sup>8)</sup>                               | n/a                                                          | n/a                                                                                               |
| SHS, SHI | 315 – 630 nm:<br>> 1.2% @ 350 nm                                               | 315 – 630 nm:<br>> 2.4% @ 350 nm                                             | 325 – 450 nm:<br>> 1% @ peak<br>600 – 650 nm:<br>0.5% @ peak | n/a                                                                                               |
| DFG      | 2200 – 4200 nm:<br>> 1.5% @ 3000 nm<br>4000 – 16 000 nm:<br>> 0.1% @ 10 000 nm | 2200 – 4200 nm:<br>> 3% @ 3000 nm<br>4000 – 16 000 nm:<br>> 0.2% @ 10 000 nm | n/a                                                          | 4000 – 16 000 nm:<br>> 0.3% @ 10 000 nm, 30 – 2000 µJ pump<br>> 0.2% @ 10 000 nm, 12 – 30 µJ pump |

## PUPM LASER, ENVIRONMENTAL & UTILITY REQUIREMENTS

Refer to lightcon.com

<sup>1)</sup> Dual output model (-TWINS) available, providing two optically synchronized and simultaneous outputs.

<sup>2)</sup> Long pulse mode is optional, providing 650 – 1010 nm (signal) and 1050 – 2500 nm (idler) range at < 290 fs.

<sup>3)</sup> Pump pulse energy up to 5 mJ applicable, refer to ORPHEUS-HE.


<sup>4)</sup> Specified before pulse compressor. Conversion efficiency at peak is 10% for signal and idler combined.

<sup>5)</sup> After pulse compression. Typical pulse duration before compression: 120 – 250 fs, after compression: 25 – 70 fs @ 650 – 920 nm, 40 – 100 fs @ 1200 – 2000 nm.

<sup>6)</sup> Expressed as normalized root mean squared deviation (NRMSD).

<sup>7)</sup> DUV conversion efficiency is specified for pump power up to 10 W and frequencies up to 200 kHz. In the case of higher pump power, conversion efficiency decreases. The maximum output power is 40 mW at 200 nm.

<sup>8)</sup> For > 15 µJ pump pulse energy.



## Drawings

### ORPHEUS

