

# ORPHEUS | TWINS

## Dual Optical Parametric Amplifier

### FEATURES

- Two simultaneous and independent outputs
- 210 – 16000 nm tuning range
- Single-shot – 2 MHz repetition rate
- Up to 60 W pump power
- Up to 0.5 mJ pump pulse energy
- CEP-stable option



ORPHEUS-TWINS consists of two independently tunable optical parametric amplifiers (OPAs); thus, providing two simultaneous outputs. Integrated into a single housing, both OPAs share the same white-light seed enabling the generation of broadband mid-infrared (MIR) radiation with a passively stable carrier-envelope phase (CEP).


Each of the OPA can be separately configured to be a version of ORPHEUS, ORPHEUS-F, or ORPHEUS-ONE. Check the respective models for more information and detailed specifications.


### SPECIFICATIONS

Model	ORPHEUS-TWINS
<b>OUTPUT FROM ORPHEUS-TWINS</b>	
Tuning range	Choice between ORPHEUS, ORPHEUS-F, and ORPHEUS-ONE configurations
Output pulse energy	Depends on the configuration, see the specifications of the chosen models
Spectral bandwidth	Depends on configuration, 100 – 750 cm <sup>-1</sup>
Pulse duration	Depends on configuration, down to 40 fs
Supported repetition rates	Single-shot – 2 MHz
<b>PUMP LASER REQUIREMENTS</b>	
Required pump laser	PHAROS or CARBIDE
Center wavelength	1030 ± 10 nm
Maximum pump power	60 W
Repetition rate	Single-shot – 2 MHz
Pump pulse energy <sup>1)</sup>	16 – 500 μJ
Pulse duration <sup>2)</sup>	180 – 300 fs


<sup>1)</sup> Up to 2 mJ on request.

<sup>2)</sup> FWHM, assuming Gaussian pulse shape.



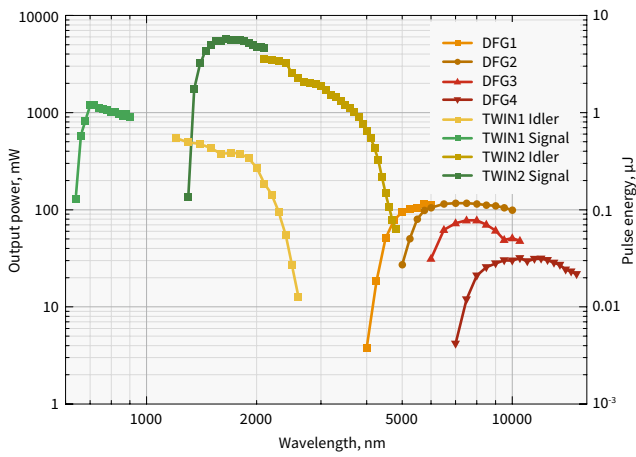


**ORPHEUS-TWINS (ONE/F configuration)**  
tuning curves. Pump: 40 W, 40 µJ, 1000 kHz

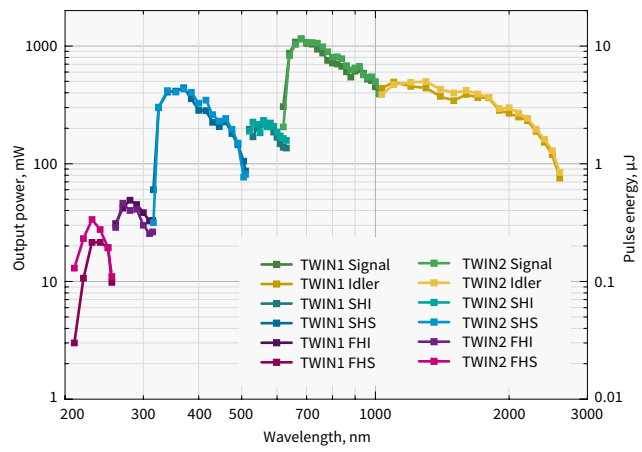

**ORPHEUS-TWINS (ORPHEUS/ORPHEUS configuration)**  
tuning curves. Pump: 20 W, 20 µJ, 100 kHz

For custom tuning curves visit <http://toolbox.lightcon.com/tools/tuningcurves/>

## DRAWINGS

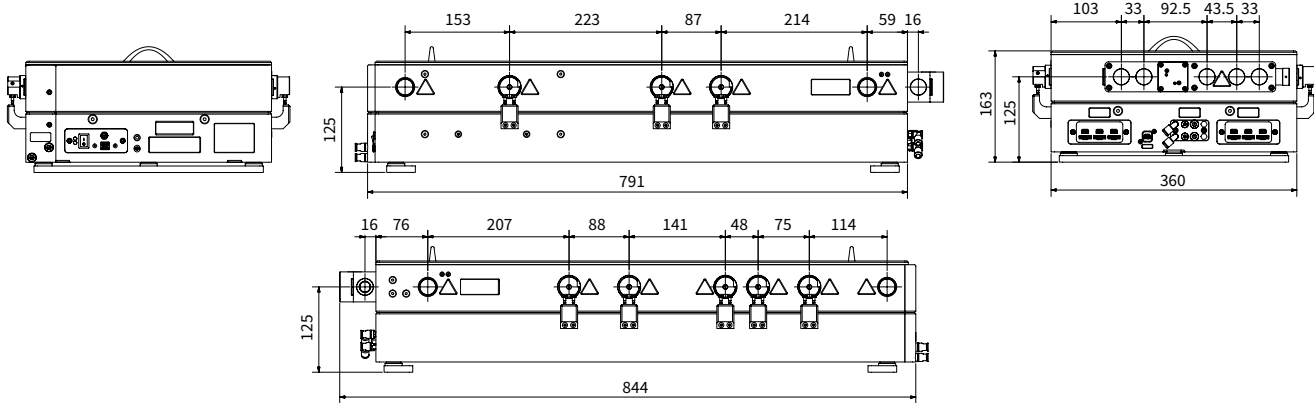

ORPHEUS-TWINS drawings