

PRONTO-500-IPL


Portable laser probe for IPL sources, 2 - 350 J per pulse



KEY FEATURES

- > **HIGH ENERGY PER PULSE**
Accurate readings up to 350 J/pulse!
- > **EASY TO USE**
The touchscreen color LCD allows for a friendly user interface. You can make a measurement with just the touch of a button!
- > **DATA LOGGING**
Save your data to the internal memory and then transfer them to your PC over the USB connection.
- > **LARGE APERTURE**
55 mm Ø aperture to accommodate large beams
- > **RUGGED**
 - All-metal body
 - High damage thresholds
- > **PROTECTIVE WINDOW**
 - For measurements with gel-coupled IPL heads.
 - Protects the absorber, easy to clean
- > **SERIAL COMMANDS**
Serial commands are available to let you take full control of your PRONTO from your PC.

USER INTERFACE (SSE MODE)

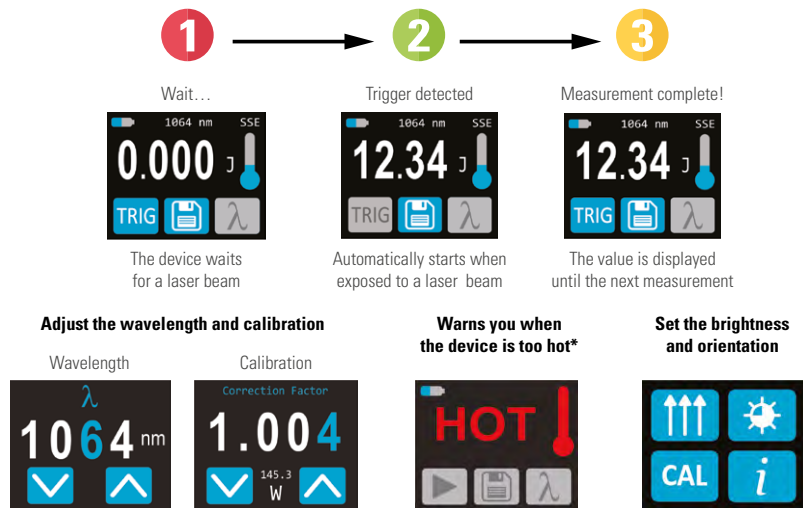

ACCESSORIES



Stand with steel post



Pelican carrying case

PRONTO-500-IPL

Specifications



*Also traceable to NRC-CNRC



PRONTO-500-IPL

MAX PULSE ENERGY (SINGLE SHOT)	350 J
EFFECTIVE APERTURE	55 mm ϕ
APERTURE TYPE	Full aperture with protective window

MEASUREMENT CAPABILITY

Spectral range	0.19 - 2.5 μm
Calibrated spectral range	1064 nm
Energy range	2 - 350 J
Noise equivalent energy	500 mJ
Minimum repetition period	15 s (= time between measurements)
Maximum pulse width	433 ms
Accuracy	$\pm 5\%$

DAMAGE THRESHOLDS

Maximum average power density	45 kW/cm ² (1064 nm, 10 W, CW)
Pulsed laser damage threshold	175 J/cm ² (10 ms pulses)
Maximum allowable absorber temperature	65 °C


GENERAL SPECIFICATIONS

Display type	Touchscreen color LCD
Display size	28.0 x 35.0 mm (128 x 160 pixels)
Data storage	50 000 pts
Battery type	Rechargeable Li-ion
Battery life	17 hours or 4 200 measurements (with brightness set at 25%)
Battery recharge via	USB port

PHYSICAL CHARACTERISTICS

Effective aperture	55 mm ϕ
Dimensions (sensor head)	88W x 88L x 32D mm (194L with handle)
Dimensions (monitor)	41W x 136L x 16D mm
Weight	930 g

ORDERING INFORMATION

Compatible stand	STAND-S-443
Product page	



フォトテクニカ株式会社

〒336-0017 埼玉県さいたま市南区南浦和 2-18-2 <https://www.phototechnica.co.jp>
TEL: 048-871-0067 FAX: 048-871-0068, e-mail: voc@phototechnica.co.jp