

ORPHEUS | ONE


Mid-IR Collinear Optical Parametric Amplifier

FEATURES


- High conversion efficiency in mid-IR
- 1350 – 16000 nm tuning range
- Single-shot – 2 MHz repetition rate
- Up to 80 W pump power
- Up to 2 mJ pump pulse energy




ORPHEUS-ONE is an optical parametric amplifier designed for the infrared spectral range. It has fewer wavelength extension options but provides higher conversion efficiency into mid-IR compared to ORPHEUS-HP. While ORPHEUS-ONE is simple and efficient, the output spectral bandwidth is limited by the pump pulses. For sum-frequency generation (SFG) spectroscopy and other applications requiring broad-bandwidth infrared pulses – consider ORPHEUS-MIR.

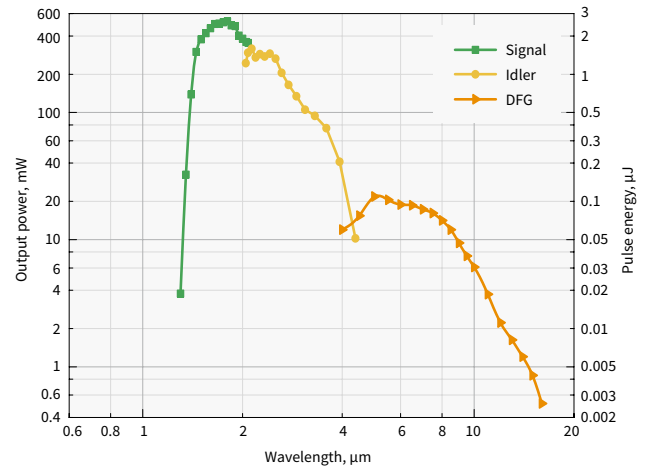

Typical tuning curves of **ORPHEUS-ONE**.
Pump: 6 W, 30 μ J, 200 kHz

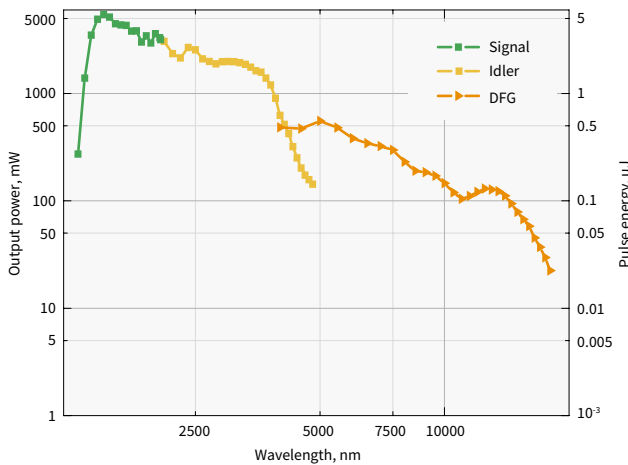

Typical tuning curves of **ORPHEUS-ONE-HP**.
Pump: 40 W, 40 μ J, 1000 kHz

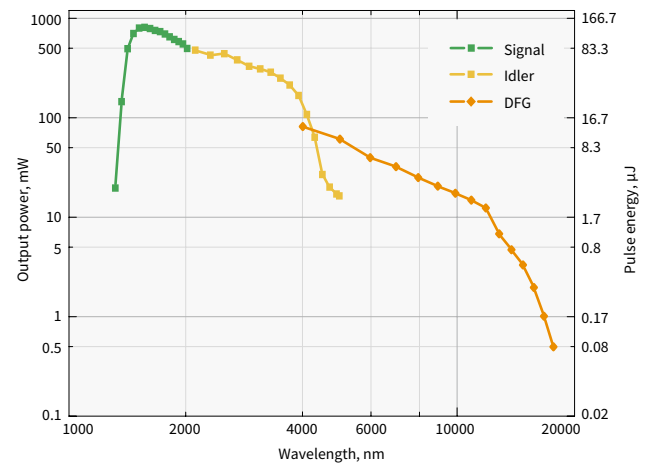

Typical tuning curves of **ORPHEUS-ONE-HE**.
Pump: 6 W, 1 mJ, 6 kHz

For custom tuning curves visit <http://toolbox.lightcon.com/tools/tuningcurves/>

SPECIFICATIONS


Model	ORPHEUS-ONE	ORPHEUS-ONE-HP	ORPHEUS-ONE-HE
OUTPUT FROM ORPHEUS-ONE (1350 – 4500 nm)			
Tuning range	1350 – 2000 nm (Signal) 2100 – 4500 nm (Idler)		
Maximum pump power	8 W	80 W	
Pump pulse energy	12 – 400 μJ	12 – 400 μJ	400 – 2000 μJ
Conversion efficiency at peak ¹⁾ (Signal at 1550 nm)	> 9%, pump 30 – 2000 μJ > 6%, pump 12 – 30 μJ		
Spectral bandwidth	60 – 150 cm ⁻¹ @ 1450 – 2000 nm		60 – 150 cm ⁻¹ @ 1450 – 2000 nm
Long-term power stability, 8 h ²⁾	< 2% @ 1550 nm		
Pulse-to-pulse energy stability, 1 min ²⁾	< 2% @ 1550 nm		
Features	Cost-effective	High power	High energy

OPTIONAL WAVELENGTH EXTENSIONS


DFG option	Tuning range	4500 – 16000 nm (based on signal and idler calibration)	
	Conversion efficiency ¹⁾	> 0.3% @ 10000 nm, when pump energy 30 – 2000 μJ > 0.2% @ 10000 nm, when pump energy 12 – 30 μJ	
	Spectral bandwidth	60 – 150 cm ⁻¹ @ 5000 – 8000 nm	60 – 120 cm ⁻¹ @ 5000 – 8000 nm

¹⁾ Conversion efficiency specified as the percentage of pump power to ORPHEUS-ONE.


²⁾ Expressed as NRMSD (normalized root mean squared deviation).



DRAWINGS

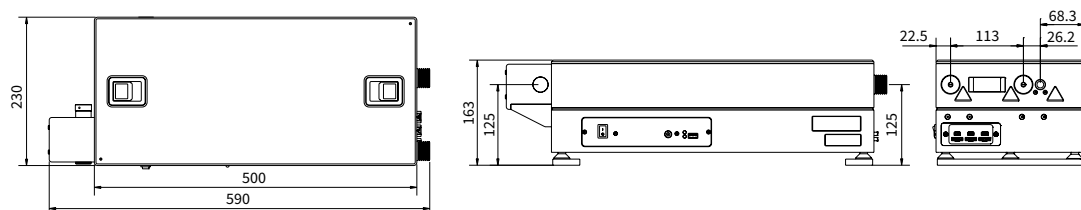

ORPHEUS-ONE drawings

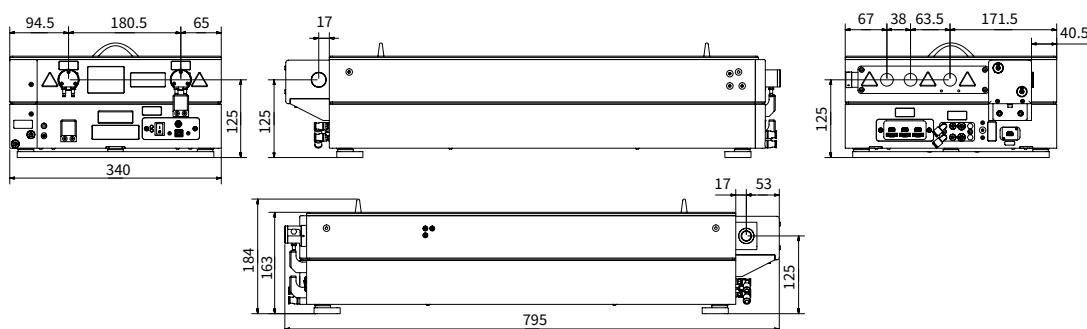

ORPHEUS-ONE-HP / ORPHEUS-HP drawings