

CARBIDE



Unibody-Design Industrial-Grade Femtosecond Lasers

FEATURES


- 190 fs – 20 ps tunable pulse duration
- 800 μ J maximum pulse energy
- 80 W maximum output power
- Single-shot – 2 MHz repetition rate
- Pulse picker for pulse-on-demand mode
- Industrial-grade design
- Air- or water-cooled models
- Optional automated harmonic generator
- Optional scientific interface module




CARBIDE-CB3

CARBIDE is a series of femtosecond lasers combining high average power and excellent power stability. CARBIDE features market-leading output parameters without compromises to beam quality and stability. A compact and robust optomechanical CARBIDE design allows a variety of applications in top-class research centers, as well as display, automotive, LED, medical, and other industries. The reliability of CARBIDE has been proven by hundreds of systems operating 24/7 in the industrial environment.


The tunability of CARBIDE lasers enables our customers to discover the most efficient manufacturing processes. Tunable parameters include pulse duration (190 fs – 20 ps), repetition rate (single-shot – 2 MHz), pulse energy (up to 0.8 mJ), and average power (up to 80 W). A pulse-on-demand mode is available using the built-in pulse picker. The CARBIDE lasers can be equipped with industrial-grade modules.

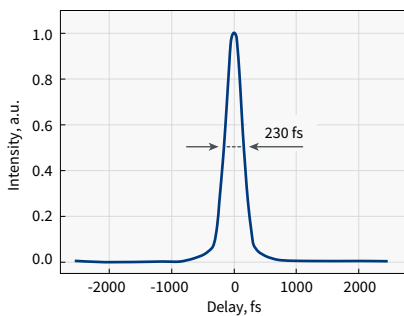


Typical pulse duration of CARBIDE laser

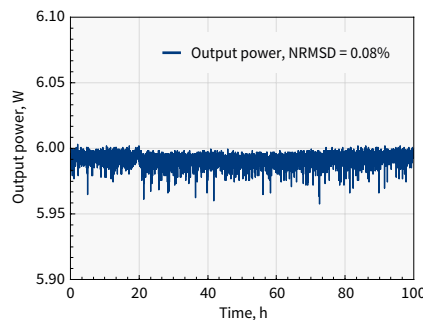


Long-term power stability of CARBIDE-CB5

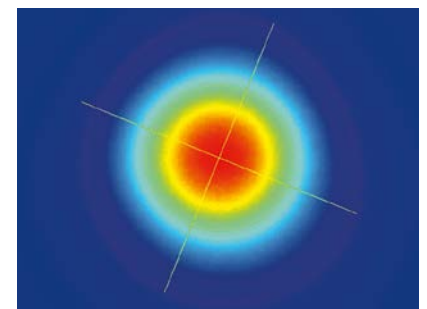


Typical beam profile of CARBIDE-CB5

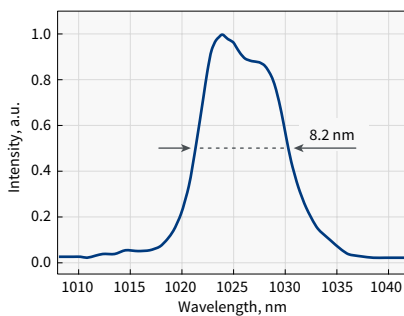

Typical spectrum of CARBIDE laser

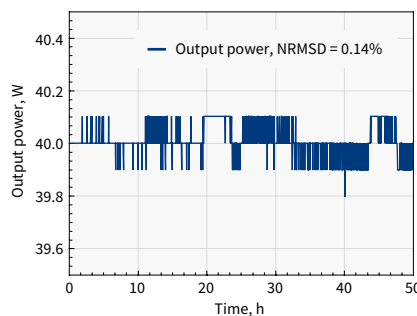

Long term power stability of CARBIDE-CB3

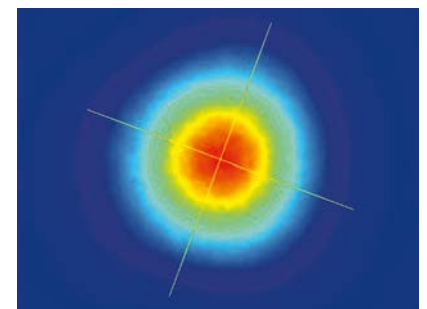

Typical beam profile of CARBIDE-CB3

SPECIFICATIONS

NEW

Model	CB3-20W	CB3-40W	CB3-80W	CB5	CB5-SP
-------	---------	---------	---------	-----	--------

OUTPUT CHARACTERISTICS

Cooling method	Water-cooled			Air-cooled ¹⁾	
Maximum output power	20 W	40 W	80 W	6 W	5 W
Pulse duration ²⁾	< 250 fs			< 290 fs	< 190 fs
Pulse duration tuning range	250 fs – 10 ps			290 fs – 20 ps	190 fs – 20 ps
Maximum pulse energy	0.4 mJ		0.8 mJ	100 µJ	83 µJ
Repetition rate	Single-shot – 1 MHz	Single-shot – 1 MHz (2 MHz on request)	Single-shot – 2 MHz	Single-shot – 1 MHz	
Pulse selection	Single-shot, pulse-on-demand, any fundamental repetition rate division				
Center wavelength ³⁾	1030 ± 10 nm				
Polarization	Linear, horizontal; 1 : 1000			Linear, vertical; 1 : 1000	
Beam quality	TEM ₀₀ ; M ² < 1.2				
Beam diameter ⁴⁾	2.5 mm		2.7 mm	1.4 mm	1.5 mm
Pulse-to-pulse energy stability ⁵⁾	RMS deviation ⁶⁾ < 0.5% over 24 h				
Long-term power stability	RMS deviation ⁶⁾ < 0.5% over 100 h				
Beam pointing stability	< 20 µrad/°C				
Pulse picker		FEC ⁷⁾		included	included ⁸⁾
Pulse picker leakage		< 0.5%		< 2%	< 0.1%

OPTIONAL EXTENSIONS

Harmonic generators	Integrated, optional (see page 14)				
Output wavelength	515 nm, 343 nm, or 257 nm				
Optical parametric amplifier	Integrated, optional (see page 15)				
Tuning range	320 – 10000 nm				
BiBurst option	Tunable GHz and MHz burst with burst-in-burst capability, optional (see page 9)				
GHz-Burst					
Intra burst pulse period ⁹⁾	440 ± 40 ps				n/a
Number of pulses, P ¹⁰⁾	1 ... 10				
MHz-Burst					
Intra burst pulse period	≈ 15 ns				
Number of pulses, N	1 ... 10				

PHYSICAL DIMENSIONS

Laser head (L × W × H)	632 × 305 × 173 mm		631 × 324 × 167 mm	
Chiller (L × W × H)	680 × 484 × 307 mm		Not required	
24 V DC power supply (L × W × H)	280 × 144 × 49 mm	320 × 200 × 75 mm	220 × 95 × 46 mm	

ENVIRONMENTAL & UTILITY REQUIREMENTS

Operating temperature	15 – 30 °C (59 – 86 °F)		17 – 27 °C (62 – 80 °F)	
Relative humidity	< 80% (non-condensing)			
Electrical requirements	110 – 220 V AC, 50 – 60 Hz			
Rated power	600 W	1000 W	300 W	
Power consumption	500 W	700 W	150 W	
Electrical requirements (chiller)	100 – 230 V AC, 50 – 60 Hz		200 – 230 V AC, 50 – 60 Hz	
Rated power (chiller)	1400 W	2000 W	Not required	
Power consumption (chiller)	1000 W	1300 W		

¹⁾ Water-cooled version available on request.

²⁾ Assuming Gaussian pulse shape.

³⁾ Precise wavelengths for specific models available upon request.

⁴⁾ FWHM, measured at laser output, using maximum pulse energy.

⁵⁾ Under stable environmental conditions.


⁶⁾ Normalized to average pulse energy, NRMSD.

⁷⁾ Provides fast energy control; external analog control input available. Response time – next available RA pulse.





⁸⁾ Enhanced contrast AOM. Provides fast amplitude control of output pulse train.

⁹⁾ Custom spacing is available on request.

¹⁰⁾ Maximum number of pulses in a burst depends on the laser repetition rate. Custom number of pulses is available on request.




STABILITY MEASUREMENTS

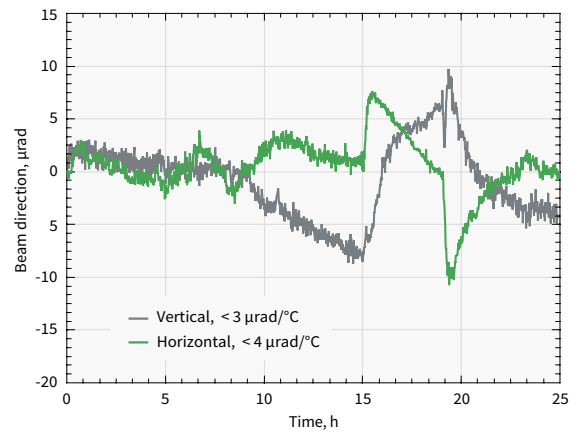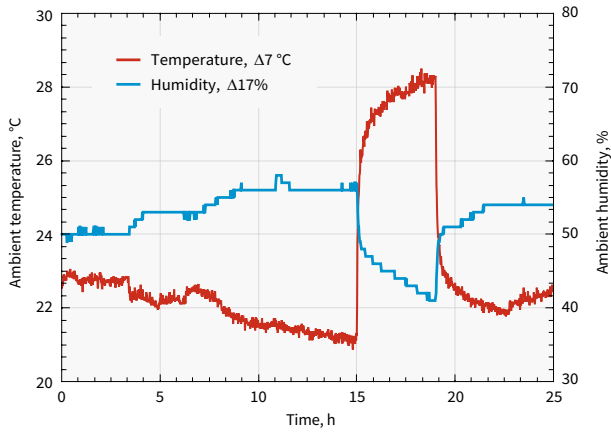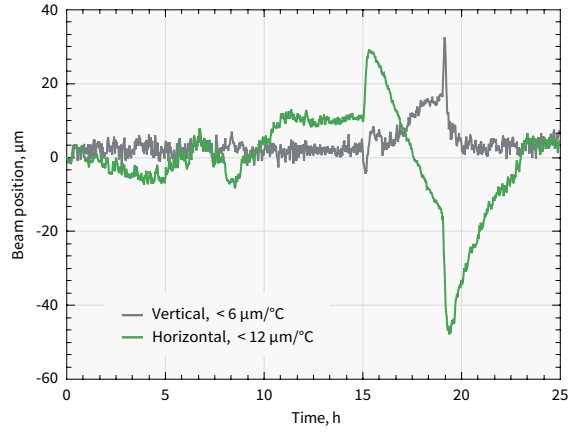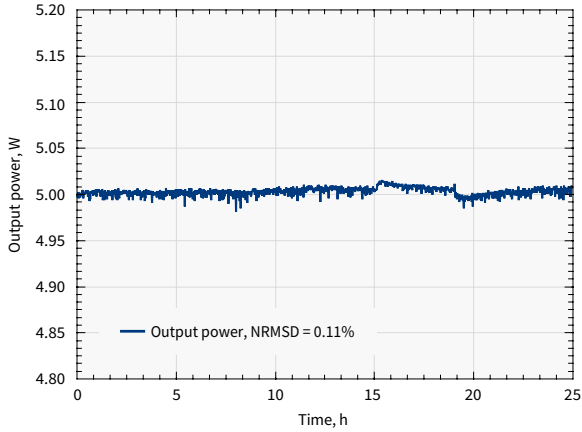


Output power, beam direction, and beam position of CARBIDE-CB5 under harsh environmental conditions

DRAWINGS

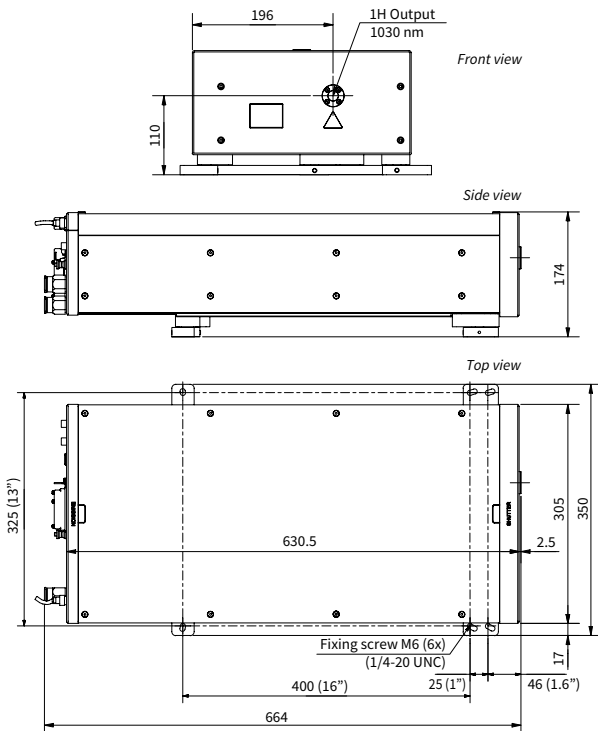

Drawing of CARBIDE-CB3

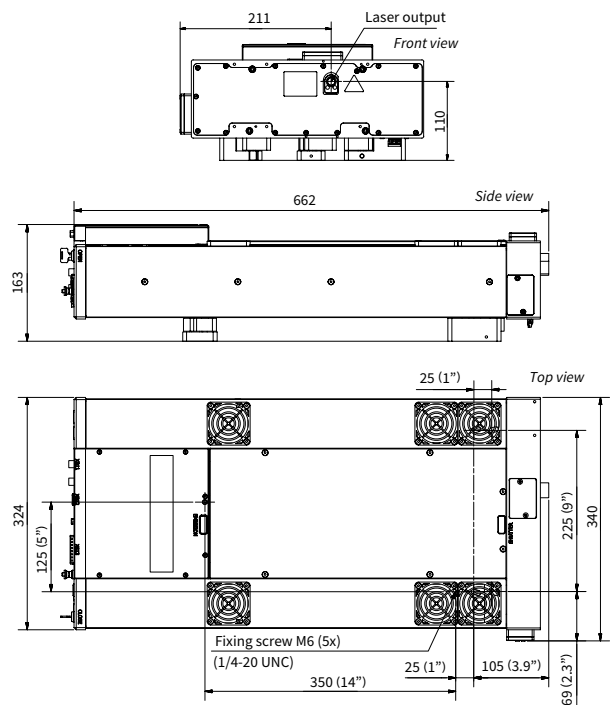

Drawing of air-cooled CARBIDE-CB5 with attenuator