


**MODELS AQS-GA4 SERIES  
ACOUSTO-OPTIC Q-SWITCH**

- CAVITY LOSS MODULATION
- HIGH OPTICAL POWER CAPABILITY
- HIGH RELIABILITY
- EXCELLENT TEMPERATURE STABILITY
- SMALL SIZE

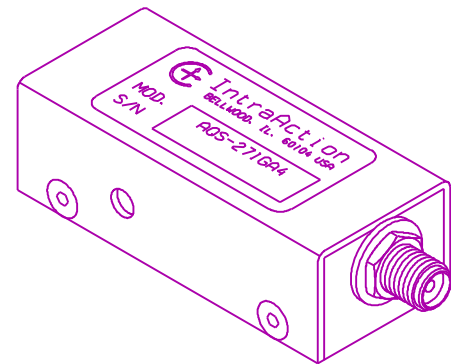

**SPECIFICATIONS**

Acousto-optic Material <sup>1</sup>	Dense Flint Glass
Optical Wavelength <sup>2</sup>	1.047-1.064 $\mu\text{m}$
Optical Power Capability	>500 Mwatts/cm <sup>2</sup>
Optical Polarization	Any
Static Optical Insertion Loss	0.3 percent
Active Aperture Height <sup>3</sup>	1 mm
Optical Rise Time	177 nsec/mm optical beam diameter
Diffraction Loss Efficiency	50 percent
RF Drive Power <sup>4</sup>	2 watts
Input Impedance/VSWR	50 ohms/1.25
RF Connector	SMA
Size (less connector) <sup>5</sup>	2.00 D X 0.63 H X 0.90 W inches 5.08 D X 1.60 H X 2.28 W cm

<b>MODEL</b>	<b><u>AQS-271GA4</u></b>	<b><u>AQS-4E1GA4</u></b>	<b><u>AQS-801GA4</u></b>
Acoustic Frequency <sup>6</sup>	27.12 MHz	40.68 MHz	80 MHz
Beam Separation (1.06 : m)	7.9 mrad	11.9 mrad	23.3 mrad

<sup>1</sup> Fused silica and TeO<sub>2</sub> materials are also available.  
<sup>2</sup> Designs for other optical wavelengths are available.  
<sup>3</sup> Other active aperture heights are available.  
<sup>4</sup> A complete line of laboratory and OEM drivers are available.  
<sup>5</sup> Smaller OEM housings are available.  
<sup>6</sup> Other acoustic frequencies are available.