

## ABOUT THE COMPACTLINE

Spectroscopy redefined, that is what we consider our CompactLine spectrometers to be. In applications where size matters, the AvaSpec CompactLine offers spectrometers with one of the smallest form factors on the market today. Because of the small size, these spectrometers are perfectly suited for integration into OEM systems and handheld devices.

Reducing the size does not compromise the performance of these instruments. With multiple configurations available, the AvaSpec-Mini series can be applied for numerous applications in various industries.

Equipped with CMOS detectors and advanced electronics and communications, the AvaSpec-Mini series offers both high resolution and speed. Manufactured with AvaMation, our semi-automated production process, the CompactLine is ready for the future!

### BENEFITS

- Size of a deck of cards
- Easy to integrate
- Suited for harsh environments
- USB powered
- Temperature and wavelength stability
- 2048 or 4096 pixel detector
- High unit-to-unit reproducibility
- Well suited for various applications



## COMPACTLINE SPECTROMETERS

Since spectroscopy is used for numerous applications, we have defined our spectrometers in different lines:



### AvaSpec-Mini2048CL & AvaSpec-Mini4096CL

The AvaSpec-Mini-CL series is available with a 2048 pixel CMOS detector or our first-to-the-market 4096-pixel array. Enjoy the speed and enhanced native UV/NIR response of CMOS with an incredible resolution of up to 0.09 nm. The low stray-light design allows levels from as low as 0.2%. The fast response time boasts data transfer speeds as fast as 4.6 ms/scan, and integration times ranging from 30  $\mu$ s to 50 s. Also available as preconfigured model.



### AvaSpec-Mini-NIR

With its wavelength range of 900-1750 nm and small form factor, the Mini-NIR is very versatile and easy to integrate into other devices, including but not limited to handheld applications. Think about grain analysis, material identification in recycling or quality control in the dairy industry. Just like the AvaSpec-Mini, the Mini-NIR has no moving parts, is very robust and can be used in all kinds of environments.


Naturally, all CompactLine products work seamlessly with our AvaSoft software. We offer custom DLL libraries for partners who have their own software.

# SPECIFICATIONS COMPACTLINE SPECTROMETERS

	AvaSpec-Mini2048CL	AvaSpec-Mini4096CL	AvaSpec-Mini-NIR
Optical bench	Symmetrical Czerny-Turner 75 mm focal length, MK2		
Wavelength range	200-1100 nm		900-1750 nm
Stray light	0,2 - 1%		1%
Sensitivity HS in counts / $\mu$ W per ms	N/A	N/A	665,000 (integral 1000-1750 nm)
Dynamic range HS	N/A	N/A	4750:1
Integration time HS	N/A	N/A	10 $\mu$ s–300 ms
Signal/noise HS	N/A	N/A	1900:1
Dark noise HS	N/A	N/A	14 counts
Sensitivity LS in counts / $\mu$ W per ms	N/A	N/A	38,000 (integral 1000-1750 nm)
Dynamic range LS	N/A	N/A	7500:1
Integration time LS	N/A	N/A	10 $\mu$ s–5 seconds
Signal/noise LS	N/A	N/A	5000:1
Dark noise LS	N/A	N/A	9 counts
Sensitivity	337,500	261,000	N/A
Dynamic range	3300		N/A
Dark noise	16 counts		N/A
Integration time	30 $\mu$ s-40 s	30 $\mu$ s-50 s	N/A
Signal/noise	330:1	300:1	N/A
Detector	HAM S11639, CMOS linear array, 2048 pixels (14 x 200 $\mu$ m)	HAM S13496, CMOS linear array, 4096 pixels (7 x 200 $\mu$ m)	InGaAs array, 256 pixels
AD convertor	16-bit, 6 MHz		16-bit, 500 kHz
Interface	USB 2.0 (480 Mbps)/pigtailed (40 cm) USB-A		
Sample speed with on-board averaging	3.0 ms/scan	6.5 ms/scan	0.53 ms/scan
Data transfer speed	4.6 ms/scan	8.9 ms/scan	1.2 ms/scan
I/O	5 bi-directional programmable I/O: 1 analog out, 1 analog in, 1 x 5V		
Dimensions, weight	95 x 68 x 20 mm, 175 g		
Power supply	Default USB power, 500 mA		
Temperature range	0-55°C		

## MORE INFORMATION

Click [here](#) for more information about gratings, resolution and extra options

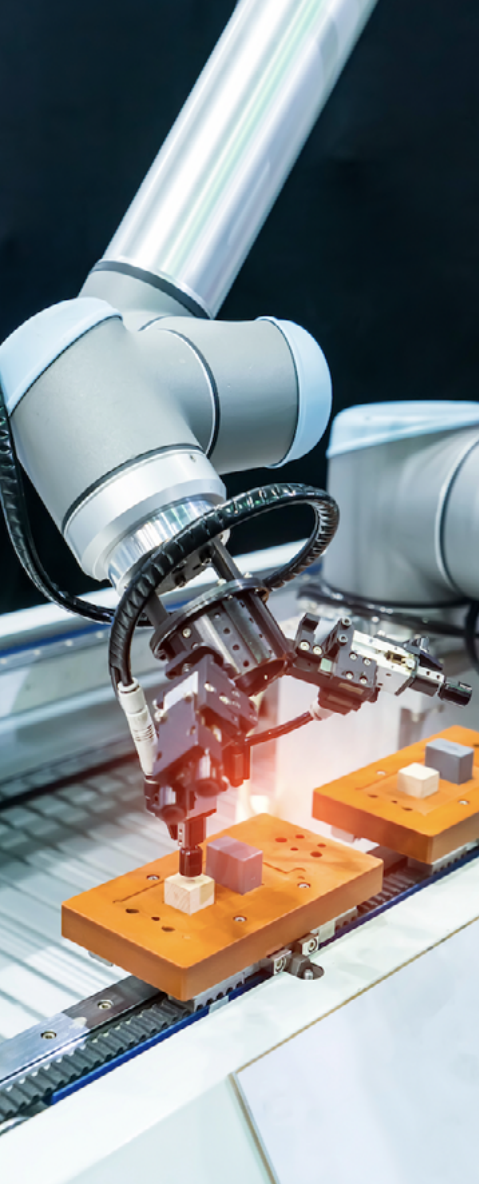

## OEM CUSTOMERS - BENCH ONLY

For seamless integration into different systems we offer our AvaBench optical bench series, available with or without our circuit board. Our miniature bench, the AvaBench-75-MN (CompactLine) features a Czerny-Turner design with a fiber-optic entrance connector (SMA), collimating focusing mirrors and a diffraction grating. This miniature bench is also available in the near-infrared range. All AvaBenches are highly customizable and versatile.

### SPECIFICATIONS

	AvaBench-75-MN2048CL/4096CL	AvaBench-Mini-NIR256-1.7
Implemented in	AvaSpec-Mini2048CL/4096CL	AvaSpec-Mini-NIR
Focal length	75 nm	
Numerical aperture	0.078	
Wavelength range	200-1100 nm	900-1750 nm
Resolution (FWHM)	0.05-20 nm	2-50 nm
Stray light	0.2-1%	<1%
Gratings	See available options on our website	
Slits	10, 25, 50, 100, 200, 500 $\mu$ m	50, 100, 200, 500 $\mu$ m
Detectors	HAM-2048CL/4096CL	HAM-NIR256-1.7
Detector lens	UV/VIS-200	NA
Order-sorting filter	See options on our website	OSF-850-3/OSF-1000-3
Dimensions, weight	95 x 68 x 20 mm, 185 g	

## SUITABLE INDUSTRIES


The AvaSpec-Mini spectrometers are suited for numerous applications in various industries:



Agriculture & Food



(Bio)Medical




Chemistry



Environmental




Lighting



Semiconductor



Gemology



Original Equipment  
Manufacturers

## TAKE A LOOK INSIDE

## Custom Software Library (DLL)

2048 or 4096 pixel  
CMOS detector

## Weights only 175 gram

Miniature size  
95 x 68 x 20 (H x W x D)

## No moving parts

## High unit-to-unit reproducibility

