

# Femtum Nano 2800

Femtum introduces its first pulsed laser for industrial use. This reliable laser produces nanosecond pulses in the microjoule range. Non-metal processing, including semiconductor processing, thin films patterning and polymer welding in the mid-IR is now accessible !



## Technical Specifications

Optical <sup>1</sup>	2800-5-25 <sup>2</sup>	2800-5-100 <sup>2</sup>	2800-30-100 <sup>2</sup>
Signal wavelength	2800 (± 20) nm	2800 (± 20) nm	2800 (± 20) nm
Output power	< 125 mW	< 500 mW	< 3 W
Repetition rate	5 kHz	5 kHz	30 kHz
Pulse duration	< 200 ns	< 200 ns	< 200 ns
Pulse energy	~ 25 µJ	~ 100 µJ	~ 100 µJ
M <sup>2</sup> (Average of X & Y)	< 1.3	< 1.3	< 1.3

## System specifications<sup>1</sup>

Dimensions (W x H x D)	19 x 5.5 x 20.5 in. (rack-mount, 3U)
Cooling	Air cooling
Voltage	100/240 V AC, 50/60 Hz
Beam delivery	Fiber cable or free space
Controller	Computer-controlled (ethernet com.)

## KEY FEATURES


- Compact and turn-key system
- Single-mode output
- High repetition rate & pulse energy
- Fiber delivery cable
- Fast shutter (optional)

## APPLICATIONS


- Semiconductor processing
- Thin-films patterning
- Polymer surface texturing, welding
- Efficient mid-IR pump source
- Tissue ablation

## Graphs

Typical pulse shape

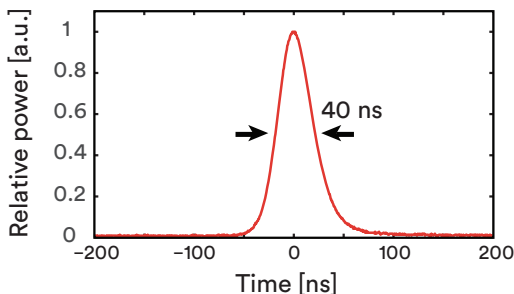

Typical spectrum<sup>3</sup>

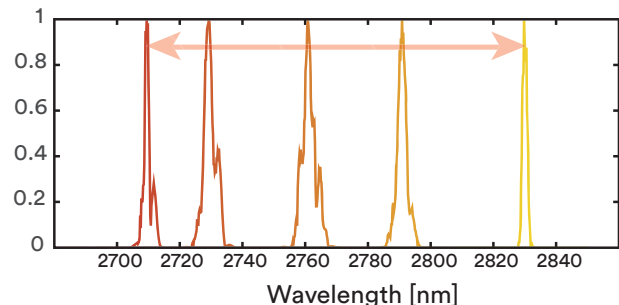

<sup>1</sup> Specifications subject to change

<sup>2</sup> Custom specifications upon request

<sup>3</sup> Narrow linewidth option upon request

Femtum Inc.

1-581-995-5157  
info@femtum.com  
femtum.com

1405 boul. Parc-Technologique, 2nd floor  
Québec (QC) G1P 4P5  
Canada

© 2023 Femtum Inc. All Rights Reserved.

PHOTO  
TECHNICA

www.phototechnica.co.jp

フォトテクニカ株式会社

〒336-0017 埼玉県さいたま市南区南浦和 2-18-2  
TEL:048-871-0067 FAX:048-871-0068  
e-mail:voc@phototechnica.co.jp