
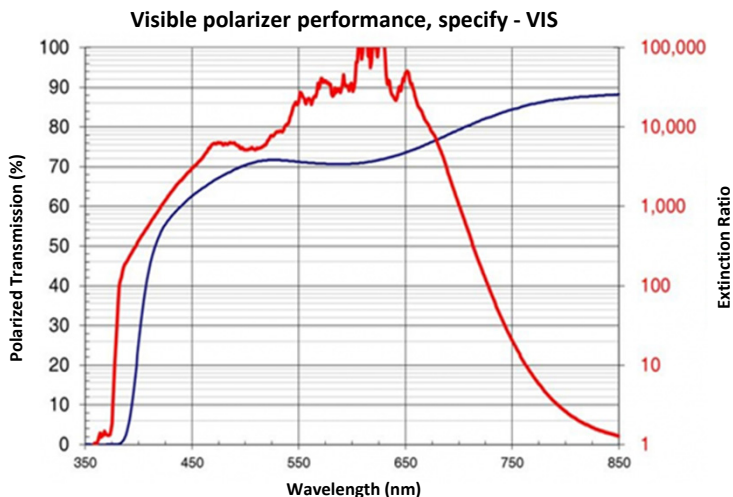


Precision Linear Polarizer

Meadowlark Optics manufactures Precision Linear Polarizers using dichroic sheet polarizer material laminated between high quality glass substrates (BK 7 material, $\lambda/10$ flat). For visible wavelength polarizers, this construction produces a total transmitted wavefront distortion of less than $\lambda/5$.

We use various polarizer materials to cover wavelengths between 320 and 2000 nm. Both visible and near infrared polarizers are supplied with a high-efficiency, broadband antireflection (AR) coating; single-layer AR coatings are optional on our ultraviolet polarizers.

Both mounted and unmounted Precision Linear Polarizers are offered as standard products. Meadowlark Optics Precision Linear Polarizers have their transmission axis clearly marked.

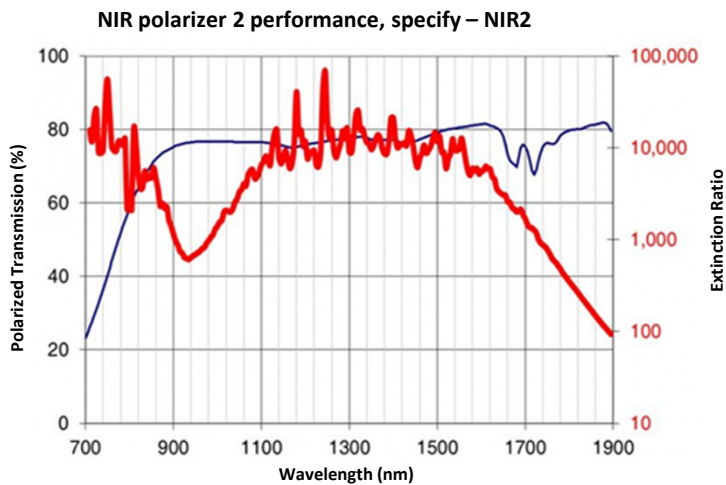

Key Features

• • •

- High extinction ratios
- Excellent surface quality
- Wide angular acceptance
- Low transmitted wavefront distortion
- Ultraviolet, visible, near infrared wavelengths

Polarization Suite

• • •

Linear Polarizers

- Precision Linear Polarizer
- High Contrast Linear Polarizer
- Ultra-High Contrast Linear Polarizer
- Glan-Thompson Polarizer
- Ultra Broadband Polarizer
- MWIR Polarizer
- Deep Ultraviolet Polarizer

Beamsplitting Polarizers


- Versalight Polarizer
- Wire Grid Beam Splitter
- Laser Line Beamsplitting Polarizer
- Broadband Beamsplitting Polarizer
- Polarizing Bandpass Filter

Circular Polarizers


- Dichroic Circular Polarizer
- Beam Separator



UV polarizer performance, specify – UV1 (uncoated window)

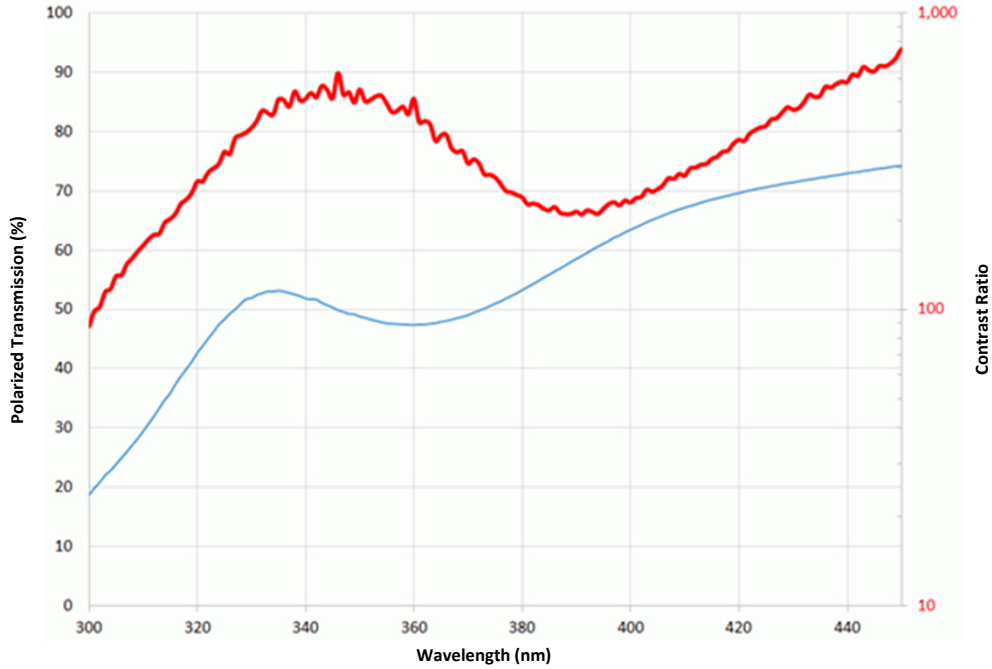

NIR polarizer 1 performance, specify – NIR1

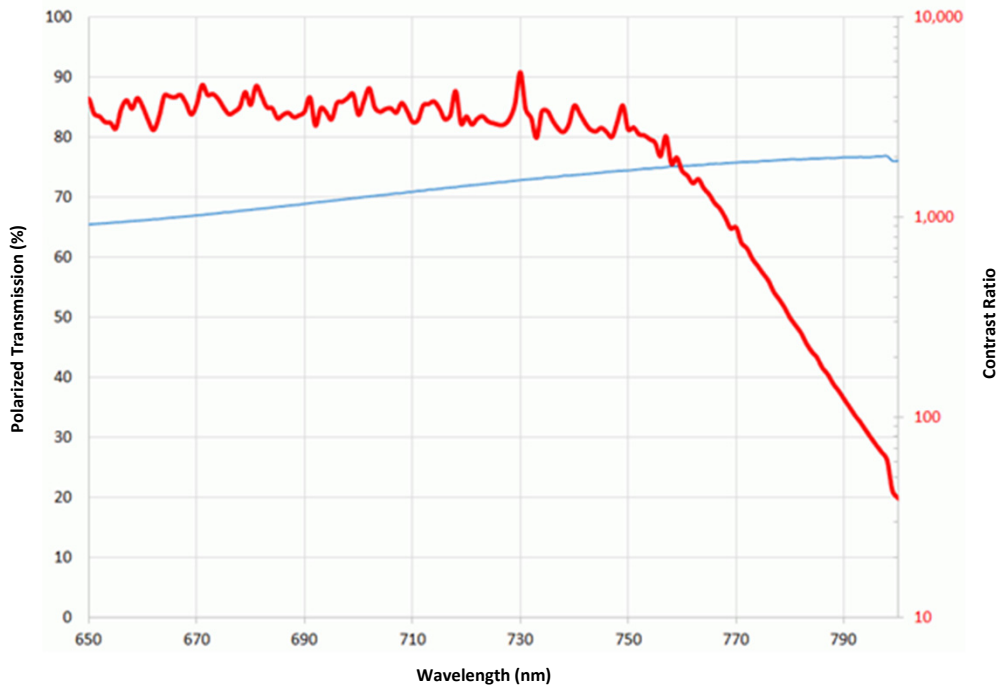



ORDERING INFORMATION			
Mounted			
Clear Aperture in. (mm)	Thickness ± 0.020 in. (±0.51 mm)	Diameter ± 0.005 in. (± 0.13 mm)	Part Number
0.40 (10.2 mm)	0.25 (6.35 mm)	Ø1.00 (Ø25.4 mm)	DPM – 050 – UV1
0.40 (10.2 mm)	0.25 (6.35 mm)	Ø1.00 (Ø25.4 mm)	DPM – 050 – VIS
0.40 (10.2 mm)	0.25 (6.35 mm)	Ø1.00 (Ø25.4 mm)	DPM – 050 – NIR1
0.40 (10.2 mm)	0.25 (6.35 mm)	Ø1.00 (Ø25.4 mm)	DPM – 050 – NIR2 – n
0.70 (17.8 mm)	0.35 (8.9 mm)	Ø1.00 (Ø25.4 mm)	DPM – 100 – UV1
0.70 (17.8 mm)	0.35 (8.9 mm)	Ø1.00 (Ø25.4 mm)	DPM – 100 – VIS
0.70 (17.8 mm)	0.35 (8.9 mm)	Ø1.00 (Ø25.4 mm)	DPM – 100 – NIR1
0.70 (17.8 mm)	0.35 (8.9 mm)	Ø1.00 (Ø25.4 mm)	DPM – 100 – NIR2 – n
1.20 (30.5 mm)	0.50 (12.7 mm)	Ø2.00 (Ø50.8 mm)	DPM – 200 – UV1
1.20 (30.5 mm)	0.50 (12.7 mm)	Ø2.00 (Ø50.8 mm)	DPM – 200 – VIS
1.20 (30.5 mm)	0.50 (12.7 mm)	Ø2.00 (Ø50.8 mm)	DPM – 200 – NIR1
1.20 (30.5 mm)	0.50 (12.7 mm)	Ø2.00 (Ø50.8 mm)	DPM – 200 – NIR2 – n
Unmounted			
Clear Aperture in. (mm)	Thickness ± 0.020 in. (±0.51 mm)	Diameter +0/-0.010 in (+0/-0.25mm)	Part Number
0.40 (10.2 mm)	0.13 (3.3 mm)	Ø0.50 (Ø12.7 mm)	DP – 050 – UV1
0.40 (10.2 mm)	0.13 (3.3 mm)	Ø0.50 (Ø12.7 mm)	DP – 050 – VIS
0.40 (10.2 mm)	0.14 (3.6 mm)	Ø0.50 (Ø12.7 mm)	DP – 050 – NIR1
0.40 (10.2 mm)	0.14 (3.6 mm)	Ø0.50 (Ø12.7 mm)	DP – 050 – NIR2 – n
0.80 (20.3 mm)	0.26 (6.6 mm)	Ø1.00 (Ø25.4 mm)	DP – 100 – UV1
0.80 (20.3 mm)	0.26 (6.6 mm)	Ø1.00 (Ø25.4 mm)	DP – 100 – VIS
0.80 (20.3 mm)	0.27 (6.9 mm)	Ø1.00 (Ø25.4 mm)	DP – 100 – NIR1
0.80 (20.3 mm)	0.27 (6.9 mm)	Ø1.00 (Ø25.4 mm)	DP – 100 – NIR2 – n

Custom AR coatings are available on all polarizers.

For NIR2 polarizers, choose from the following AR coatings:

NIR2 - 1 covers 650 - 950 nm

NIR2 - 2 covers 900 - 1250 nm

NIR2 - 3 covers 1200 - 1700 nm

meadowlark optics

**PHOTO
TECHNICA**

www.phototechnica.co.jp

フォトテクニカ株式会社

SPECIFICATIONS

Substrate Material	
Ultraviolet Visible Near Infrared	UV Grade Fused Silica N-BK7 N-BK7
Polarizer Material	
Dichroic Polymer	
Transmitted Wavefront Distortion (P-V @ 632.8 nm)	
Ultraviolet Visible Near Infrared	≤ λ/2 ≤ λ/5 ≤ λ/2
Surface Quality	
40 – 20 scratch-dig	
Beam Deviation	
Ultraviolet Visible Near Infrared	≤ 2 arc-min ≤ 1arc-min ≤ 2 arc-min
Reflectance (per surface, at normal incidence)	
Ultraviolet Visible Near Infrared	~4.25% (uncoated) ≤ 0.5% ≤ 0.5%
Storage Temperature	
Ultraviolet Visible Near Infrared	-50°C to + 50°C -50°C to + 50°C -50°C to + 50°C
Operating Temperature	
Ultraviolet Visible Near Infrared	-50°C to + 50°C -50°C to + 50°C -50°C to + 50°C
Laser Damage Threshold	
1W/cm ² , CW 200 mJ/cm ² , 20 ns, visible 2 J/cm ² , 20 ns, 1064 nm	

Prolonged exposure to strong ultraviolet radiation may damage these polarizers.

Custom coatings are available. Please contact your Meadowlark Optics sales engineer for a custom quote.