

## BLAZER series

Medium-power industrial ps-laser



*BLAZER series provide industrial grade DPSS picoseconds lasers with adjustable repetition rate and high peak power. Rugged and compact design of these lasers has been a versatile tool for a variety of industrial material processing applications.*





### FEATURES

- 10-40W at 1064nm / Harmonics from 532nm to 355nm
- 100-2000 kHz repetition rate / 10 ps pulse duration
- High beam quality  $M^2 < 1.3$
- Compact, sealed and rugged industrial grade design
- Fully detachable umbilical
- Burst mode
- Integrated process shutter
- PSO

### APPLICATIONS

- Cutting and drilling for Materials such as glass, sapphire
- Thin film ablation
- Micromachining
- Patterning

### BLAZER-20F/40F Laser Head Mechanical Specifications

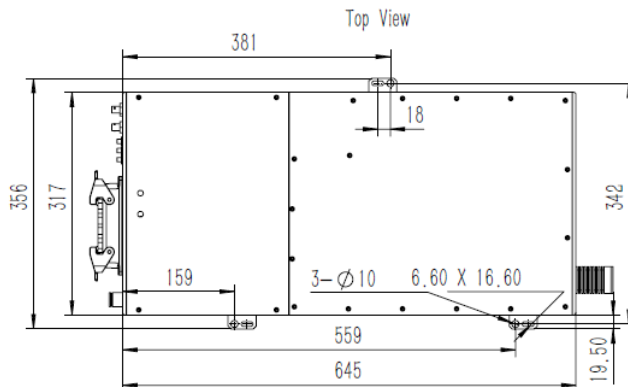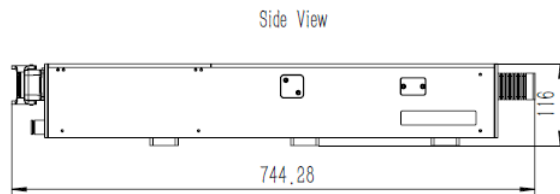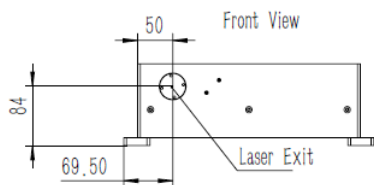

# BLAZER series Specifications



Medium-power industrial ps-laser

## Beam characteristics

Version	BLAZER-20F			BLAZER-40F		
Wavelength (nm)	1064nm (532/355 option)					
Repetition Rate <sup>1</sup> (kHz)	100 – 2000 kHz					
Average Power (W)	Average Power (W) at Different Rep. Rates <sup>2</sup>					
Wavelength (nm)	100kHz	500kHz	800kHz	400kHz	600kHz	800kHz
1064nm	13	24	26	35	40	40
532nm <sup>3</sup>	8	15	18	20	25	25
355nm	5	10	10	12	15	15
Pulse Energy (μJ)	Pulse Energy (μJ) at Different Rep. Rates					
Wavelength (nm)	100kHz	500kHz	800kHz	400kHz	600kHz	800kHz
1064nm	130	48	32.5	87.5	66.6	50
532nm	80	30	22.5	50	41.6	31
355nm	50	20	12.5	30	25	18.8
Beam Spatial Profile	TEM <sub>00</sub> (M <sup>2</sup> <1.3)					
Pulsewidth FWHM (ps)	<15ps@1064nm					
Energy Stability (RMS)	<2%					
Power Stability <sup>4</sup> (RMS)	<2%					
Polarization Ratio	>100:1					
Beam Circularity (%)	>85%					
Pointing Stability <sup>5</sup> (μrad/°C)	<50μrad/°C					
Beam Divergence <sup>6</sup> (mrad)	<1mrad					
Beam Diameter <sup>7</sup> (mm)	~2mm					

## General characteristics

AC Input	220 VAC ±5% 50-60Hz
Power Consumption	<2.5kW (typical 50W at 500kHz)
Cooling Type	Closed-loop water cooling
Operating Conditions	Temperature 15-35°C Humidity <65%
Warm-Up Time (mins)	<40mins

### NOTES

- All specifications at 1064nm and 500kHz repetition rate unless otherwise noted.
- Please provide operating Rep. rate for optimum output power.
- A lower 532nm output power version to be offered if need both 532nm & 355nm.
- Average in 8 hours with room temperature variation  $\delta T < 3^{\circ}\text{C}$ .
- Maximum deviation from beam mean centroid.
- Full angle for 86.5% of energy.
- Output of laser head at 1064nm.


[www.phototechnica.co.jp](http://www.phototechnica.co.jp)  
**フォトテクニカ株式会社**  
 〒336-0017 埼玉県さいたま市南区南浦和 1-2-17  
 TEL:048-871-0067 FAX:048-871-0068  
 e-mail:voc@phototechnica.co.jp

### China

#### Grace Laser Technology Co., Ltd.

Ju Hong BLDG B, Area B, Airport Industrial Park, Shunyi District, Beijing, China

Postcode: 101318


Tel: +86 010-60401920 Fax: +86 010-60401720 Email: sales@gracelaser.com

Web: www.gracelaser.com



# BLAZER-P series

High energy picosecond mode-locked laser

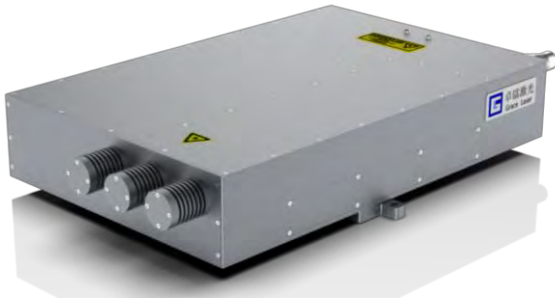

## FEATURES


- 1-200mJ at 1064nm / Harmonics from 532nm to 266nm
- 1Hz-10kHz repetition rate / 25 ps pulse width
- High beam quality  $M^2 < 1.6$
- Standard pulse width 25ps, 100ps option
- Ext. triggering jitter <4ns, Int. Triggering jitter <100ps
- RS232 interface for remote operation

*BLAZER-P laser series inherit the robust and hermetically sealed DPSS master oscillator design of BLAZER series. Diode pumped regenerative amplifier and flash lamp pumped energy amplifier produce up to 200mJ picosecond pulses. 24/7 rugged industrial design improves laser reliability and reduces running costs.*

## APPLICATIONS

- Non-linear optics
- Micromachining
- Pump source
- Satellite laser ranging

BLAZER-50P Laser Head  
Mechanical Specifications

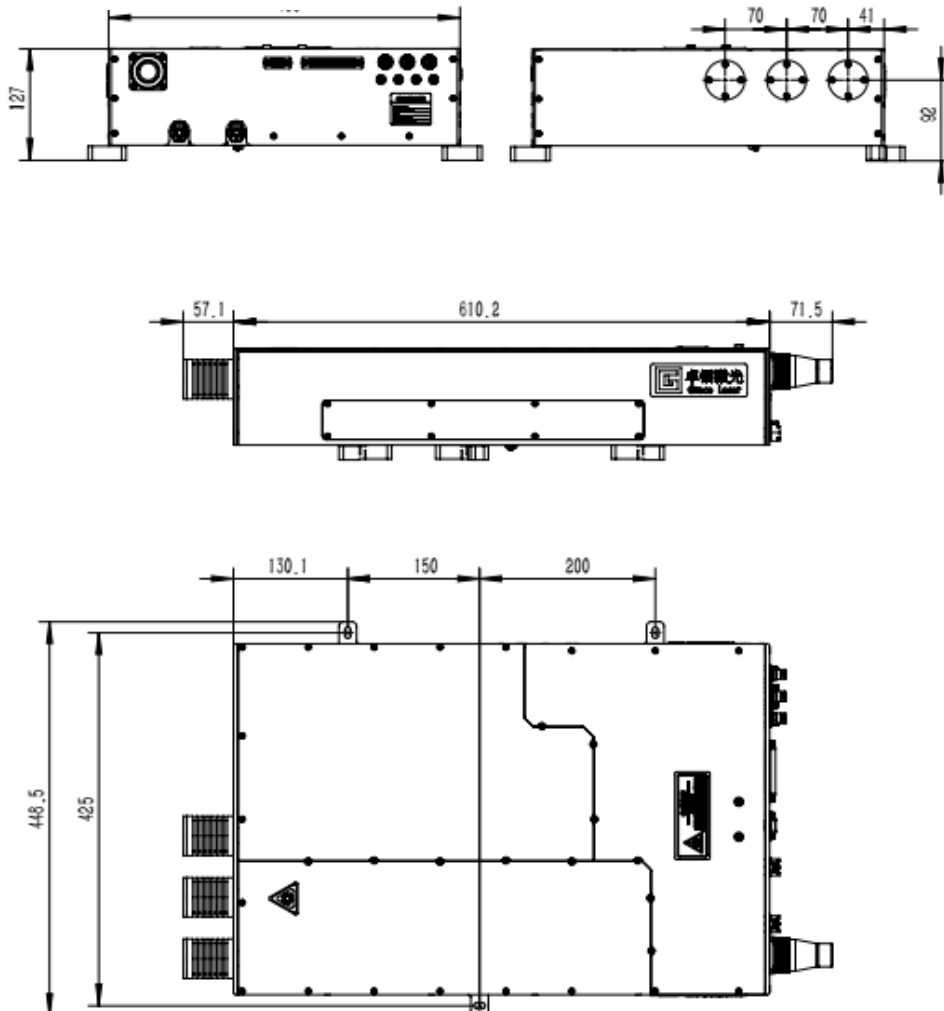

# BLAZER-P series Specifications

High energy picosecond mode-locked laser

## Beam characteristics

Version	BLAZER-2P		BLAZER-50P	BLAZER-100P	BLAZER-200P
Repetition Rate <sup>1</sup>	1-1kHz	1-10Hz	1-10Hz		
Repetition options	10kHz	/			
Pulse energy					
1064nm	1.6mJ	1.8mJ	50mJ	100mJ	200mJ
532nm	1.0mJ	1.2mJ	25mJ	50mJ	100mJ
355nm	0.6mJ	0.5mJ	15mJ	30mJ	60mJ
266nm	0.2mJ	0.2mJ	5mJ	10mJ	20mJ
Energy stability (RMS)					
1064nm	<1%				
532nm	<2%				
355nm	<3%				
266nm	<4%				
Beam Spatial Profile	TEM <sub>00</sub> (M <sup>2</sup> <1.6)				
Pulse width <sup>2</sup>	25±3ps				
Polarization Ratio	>100:1				
Beam Circularity	>85%				
Pointing Stability	<20μrad				
Beam Divergence <sup>3</sup>	<1mrad		<0.5mrad		
Beam Diameter <sup>4</sup>	~2mm	~9mm	~13mm	~18mm	


## General characteristics

Flashlamp lifetime	>5×10 <sup>7</sup>
AC Input	220 VAC ±5% 50-60Hz
Power Consumption	<1.5kW
Cooling Type	Closed-loop water cooling
Operating Conditions	Temperature 5-35℃ Humidity <80%
Warm-Up Time (mins)	<30mins

### NOTES

1. Pulse energy at 10kHz 1064nm>0.7mJ;532nm>0.5mJ;355nm>0.25mJ;266nm>0.1mJ
2. Pulse width is customizable, up to 100ps
3. Full angle for 86.5% of energy.
4. Output of laser head at 1064nm.


[www.phototechnica.co.jp](http://www.phototechnica.co.jp)  
**フォトテクニカ株式会社**  
 〒336-0017 埼玉県さいたま市南区南浦和 1-2-17  
 TEL:048-871-0067 FAX:048-871-0068  
 e-mail:voc@phototechnica.co.jp

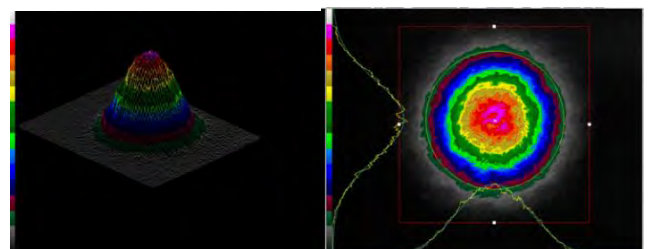

Beam profile

### China

#### Grace Laser Technology Co., Ltd.

Building 16, No.8 Anping north street, Shunyi District, Beijing, China

Postcode: 101318

Tel: +86 010-60401920 Fax: +86 010-60401720 Email: sales@gracelaser.com

