

Broad-Bandwidth MIR Optical Parametric Amplifier

Broad-bandwidth MIR pulses at high repetition rates

Continuously tunable from 2500 to 15 000 nm

Pumped by industrial-grade lasers for high stability


CEP-stable option

NEW


New housing for high output stability




ORPHEUS-MIR typical tuning curves
Pump: 80 W, 2 mJ, 40 kHz

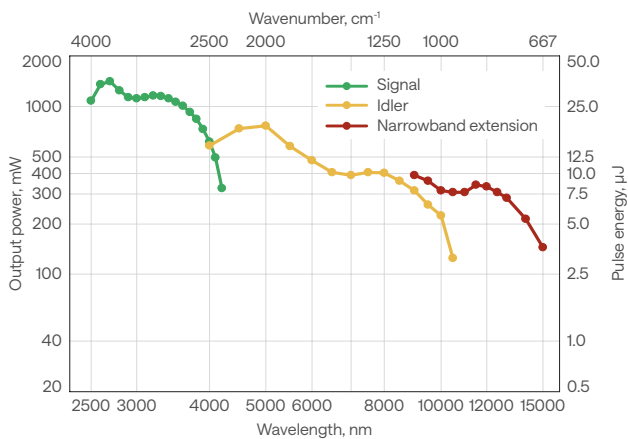


ORPHEUS-MIR typical spectral bandwidth

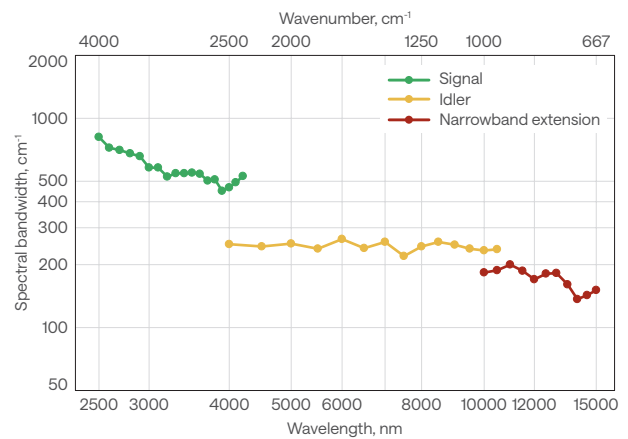

ORPHEUS-MIR typical output spectrum (left) and pulse duration (right) measured at ≈ 3000 nm

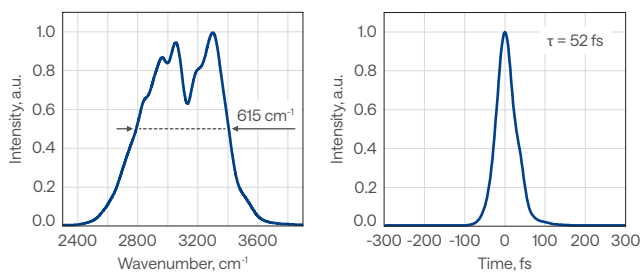

ORPHEUS-MIR pulse-to-pulse energy stability measured at ≈ 3000 nm

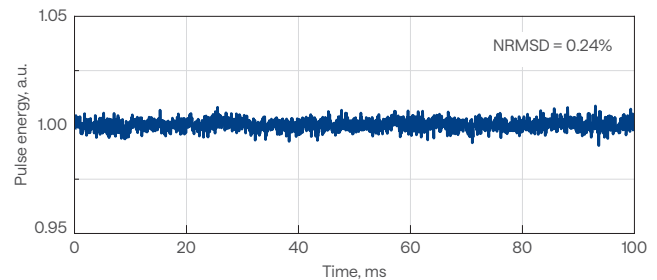

Specifications

MAIN OUTPUT (2500 – 10 000 nm)

Mode of operation	Non-collinear	Collinear ¹⁾
Tuning range	2500 – 4000 nm (signal) 4000 – 10 000 nm (idler)	2500 – 4500 nm (signal) ²⁾ 4500 – 10 000 nm (idler)
Maximum pump power	80 W	
Pump pulse energy	200 μJ – 3 mJ	
Maximum repetition rate	100 kHz	
Pulse duration	< 100 fs	< 400 fs (< 100 fs with dispersion compensation) ¹⁾
Conversion efficiency ³⁾	> 1.2% @ 3000 nm > 1.0% @ 3500 nm > 0.6% @ 5000 nm > 0.3% @ 9000 nm	
Spectral bandwidth ⁴⁾	> 300 cm ⁻¹ @ 3000 – 4000 nm > 200 cm ⁻¹ @ 4000 – 10 000 nm	
Long-term power stability, 8 h ⁵⁾	< 2% @ 5000 nm	
Pulse-to-pulse energy stability, 1 min ⁵⁾	< 2% @ 5000 nm	

AUXILIARY OUTPUT (2000 nm)

Output wavelength ⁶⁾	2000 ± 100 nm
Pulse duration	< 50 fs
Conversion efficiency ³⁾	> 8%
Spectral bandwidth	> 350 cm ⁻¹

WAVELENGTH EXTENSION (10 000 – 15 000 nm)

Tuning range	10 000 – 15 000 nm	n/a
Conversion efficiency ³⁾	> 0.2% @ 12 000 nm	
Spectral bandwidth	> 100 cm ⁻¹	

PUMP LASER, ENVIRONMENTAL & UTILITY REQUIREMENTS

Refer to lightcon.com

¹⁾ Collinear mode is achieved with an additional external separator box. Dispersion compensation is optional.


²⁾ Signal output is realized in non-collinear configuration.

³⁾ Specified as a percentage of pump power.

⁴⁾ Full width at half maximum (FWHM).


⁵⁾ Expressed as normalized root mean squared deviation (NRMSD)

⁶⁾ Not tunable, optimized for best overall performance. Not simultaneous to OPA output.



Drawings

ORPHEUS-MIR

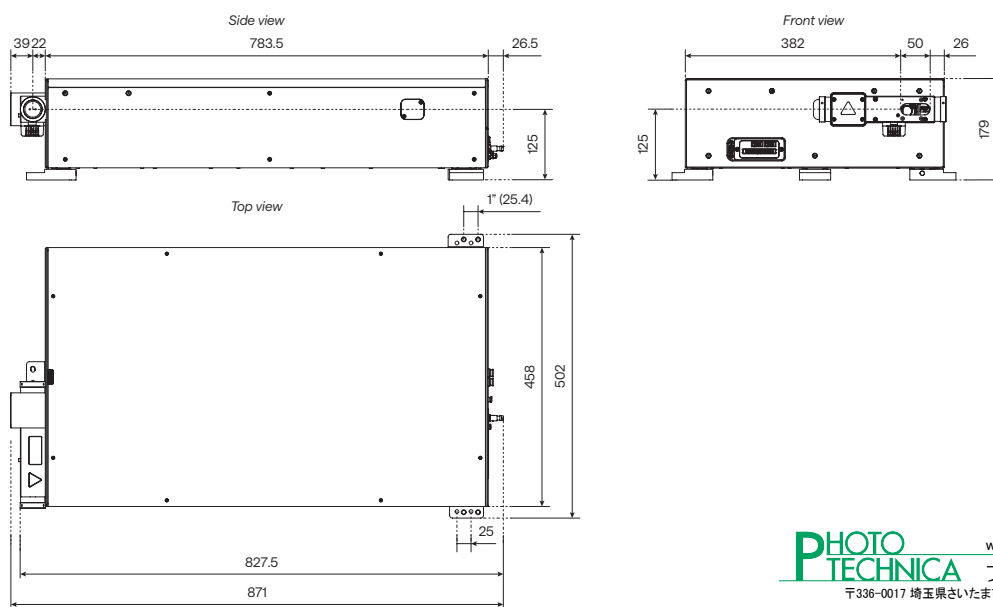


www.phototechnica.co.jp
 フォトテクニカ株式会社
 〒336-0017 埼玉県さいたま市南区南浦和 2-18-2
 TEL:048-871-0067 FAX:048-871-0068
 e-mail:voc@phototechnica.co.jp

